

PSB200


Technical Sheet

Sealed enclosure with 8"
passive subwoofer




- Compact & easy to install
- Low depth (12.5cm / 4.9")
- 250W max

FREQUENCY RESPONSE

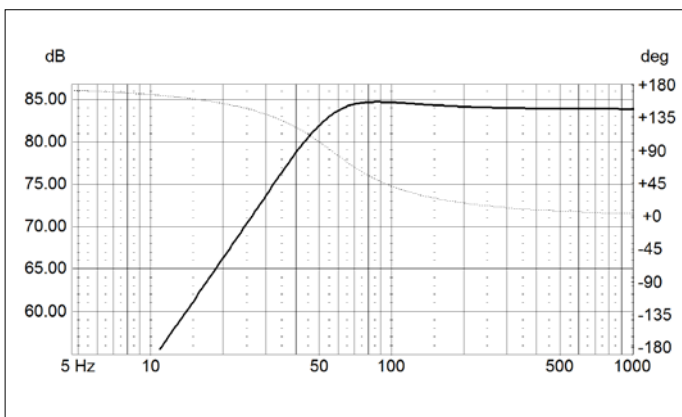

MECHANICAL DRAWING

Dimensions in mm

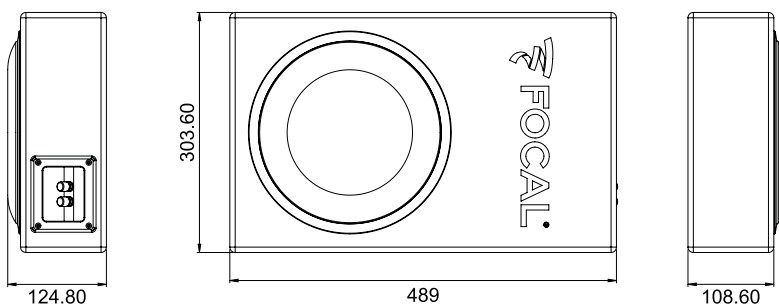

SPECIFICATIONS

Nominal power	150W RMS
Maximum power	250W
Sensitivity (2,83V/1m)	83dB
Cone	Paper
Surround	Butyl
Nom. impedance	4 Ohms
DC resistance	4 Ohms
VC diameter	1.57" (40mm)
Net weight (enclosure + subwoofer)	7kg

PARAMETERS

Fs	38Hz
Mms	112g
Cms	0.152mm/N
Vas	9.8 l
Qts	0.62
Qes	0.73
Qms	4.09
Bxl	12.6 N/A
Xmax	0.3" (8mm)
Sd	210cm ²